FIRE SEASON 2022/2023

DON'T MISS OUT ON OUR UNBELIEVABLE PRICING!

BE PREPARED THIS FIRE SEASON

PERFORMER FIRE HOSE REEL

For use on fire hose reels and in fire fighting applications

Part Number	Hose ID	Hose OD	Weight	Max W.P.	Length
	mm	mm	kg/m	psi (mpa)	mtrs
60-000-9040-018FH	19.0	26.0	0.36	145 (1.00)	34
60-000-9040-025FH	25.0	33.0	0.55	145 (1.00)	20
60-000-9060-025FH	25.0	33.0	0.55	145 (1.00)	34
60-000-9040-025FHB†	25.0	33.0	0.55	145 (1.00)	20

† Supplied with Brass Nozzle.

PERFORMER SAFETY YELLOW HOSE REEL

Premium Air/Water hose for heavy duty and general purpose applications

Part Number	Hose ID	Hose OD	Weight	Max W.P.	Length
	mm	mm	kg/m	psi (mpa)	mtrs
60-000-9040-018SY	19.0	29.0	0.44	145 (1.00)	18

* Supplied with Barrel Nozzle 28-004-012.

PVC SUCTION HOSE OPTIMA GREY PP2705

For the movement of waste materials, water, slurries, some chemicals, granules, gravel and sand.

Reinforcement: Rigid PVC Spiral
Inner Tube: Grey Smooth PVC
Cover: Grey Smooth PVC
Branding: Black Lettering
Temperature °C (min to max): -5°C to +60°C

Benefits:

- Great Flexibility
- Outstanding UV resistance
- Good chemical and abrasion resistance
- Robust construction

Part Number	Hose ID	Hose OD	Weight	Max W.P.	Length
	mm	mm	kg/m	psi	mtrs
02-000-025-020	25.0	31.5	0.390	100	20
02-000-038-020	38.0	46.2	0.650	90	20
02-000-051-020	51.0	60.7	1.100	90	20

PVC FIRE REEL HOSE AS1221

For use on fire hose reels and in fire fighting applications.

Reinforcement: High strength yarn.
INNER TUBE: PVC compound.
COVER: PVC compound.
BRANDING: White lettering.
Standards: AS/NZS 1221
Temperature °C (min to max): -5°C to +60°C

Benefits:

- Light weight
- High quality
- For low working pressure

Part Number	Hose ID	Hose OD	Weight	Max W.P.	Length
	mm	mm	kg/m	psi	mtrs
00-080-019-020	19.0	26.0	0.36	145	20
00-080-019-036	19.0	26.0	0.36	145	36
00-080-019-100	19.0	26.0	0.36	145	100
00-080-025-020	25.0	33.0	0.55	145	20
00-080-025-030	25.0	33.0	0.55	145	30
00-080-025-036	25.0	33.0	0.55	145	36
00-080-025-100	25.0	33.0	0.55	145	100

OPTIMA® PP1102 ECLIPSE BLACK

Optima® PP102 black Eclilpse hose is an economical general purpose air and water hose ideally suited for use across a wide range of industrial and construction applications.

INNER TUBE: Black smooth EPDM
REINFORCEMENT: High tensile textile cord
COVER: Black smooth EPDM
TEMPERATURE: - 40°C to + 100°C
BRANDING: Example: Optima® PP102 Eclipse General Purpose Air/ Water - 300PSI W.P - (6.4mm) - Max Temp 100°C
SAFETY FACTOR: 3 : 1

Benefits:

- Excellent resistance to ageing, atmospheric conditions and ozone
- Maximum flexibility
- Outstanding resistance to heat

Part Number	Hose ID	Hose OD	Weight	Max W.P.	Length
	mm	mm	kg/m	psi	mtrs
08-020-019-100	19.1	29.0	0.55	300	100
08-020-025-100	25.4	36.0	0.75	300	100

EXITFLEX® LIGHT DUTY BLUE PVC LAYFLAT HOSE

ExitFlex® Blue Layflat is suitable for temporary water supply or drainage of location with relatively small differences in elevation and light duty dewatering applications.

INNER TUBE: Blue PVC
REINFORCEMENT: High tensile textile cord
COVER: Blue PVC
TEMPERATURE: - 20°C to +60°C
BRANDING: Example: Exitflex® Light Duty Layflat - 55 PSI WP - 3.8 BAR - 3" DN76
SAFETY FACTOR: 3 : 1

Benefits:

- Light weight
- High quality

Part Number	Hose ID	Hose OD	Weight	Max W.P.	Length
	mm	mm	kg/m	psi	mtrs
04-005-025-100	26.0	28.3	0.15	70	100
04-005-038-100	41.0	43.2	0.19	70	100
04-005-051-100	53.0	55.3	0.26	65	100
04-005-9051-020CEW	53.0	55.3	6.5	65	20

ALL PRICES EXCLUDE GST

PVC FIRE REEL HOSE AS1221

For use on fire hose reels and in fire fighting applications.
Assembly supplied with Brass Nut and Nozzle.

Part Number	Hose ID	Hose OD	Max W.P.	Length
	mm	mm	psi	mtrs
00-080-9019-020BPW	19.0	26.0	145	20
00-080-9019-036BPW	19.0	26.0	145	36
00-080-9025-020BPW	25.0	33.0	145	20

SUCTION HOSE KITS

For use on fire hose reels and in fire fighting applications.
Assembly supplied with Brass Nut and Tail.

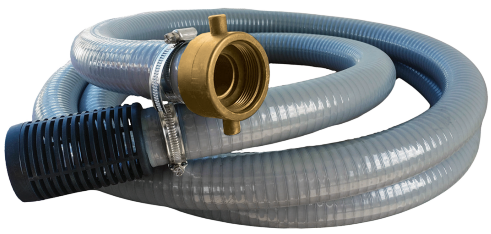

Part Number	Hose ID	Hose OD	Max W.P.	Length
	mm	mm	psi	mtrs
02-000-9038-006FKB	38.0	46.2	90	6
02-000-9038-010FKB	38.0	46.2	90	10
02-000-9051-006FKB	51.0	60.7	90	6
02-000-9051-010FKB	51.0	60.7	90	10

PERFORMER HOSE REELS

Complete with 3/4 inch Stainless Steel BSP Swivel.

Features:

- Black powdercoated steel frame
- 3/4 inch Stainless Steel BSP Swivel
- Solid and sturdy construction
- 3/4 inch inlets and outlets
- Flat packed for easy shipment

Part Number	BSP Port	Inlet BSPF	Outlet BSPF	Approx. Reel Capacities
	inch	inch	inch	
60-000-040-018	3/4 S/S Swivel	3/4	3/4	18 mm hose = 40m
60-000-060-018	3/4 S/S Swivel	3/4	3/4	18 mm hose = 60m

Hose Reel 1" x 23 metres complete with 1 inch BSP port (R25S).

Part Number	BSP Port	Inlet BSPF	Outlet BSPF	Approx. Reel Capacities
	inch	inch	inch	
60-001-040-018-016	1	1	1	25 mm hose = 23m

AUSTRALIAN STANDARD FIXED FIRE HOSE REEL KIT

With years of development behind it this Australian Standard Fixed Hose Reel is widely regarded as one of the best and most reliable available on the Australian Market todays.

Part Number	Fitted Hose					Fixed Hose Reel	
	ID (mm)	Length (m)	Max. WP (kPa)	Material	Min. Discharge Rate	Inlet	Outlet
60-050-036-012	19	36	1500	PVC	0.45 L/Sec	1" BSPF	Nozzle

COMPLETE PRE-FITTED FIRE KIT

The **00-089-900-003B** Fire Fighting Hose Kit includes:
1. Suction Hose - 1 x 6m x 38mm
2. Delivery Hose - 2 x 10m x 19mm
3. Brass Nuts & Tails, Nozzles, Strainer

The **00-089-900-003P** Fire Fighting Hose Kit includes:
1. Suction Hose - 1 x 6m x 38mm
2. Delivery Hose - 1 x 20m x 19mm
3. Brass Nuts & Tails, Nozzles, Strainer

The **00-089-900-001P** Fire Fighting Hose Kit includes:
1. Suction Hose - 1 x 4m x 38mm
2. Delivery Hose - 2 x 6m x 19mm
3. Poly Nuts & Tails, Nozzles, Strainer

FIRE HOSE REEL BARREL NOZZLE

Includes Composite Hose Tail

Part Number	Size
	inch
28-004-012	3/4
28-004-016	1

NYLON FOG NOZZLE

With Hose Tail

Part Number	Size
	inch
28-002-012	3/4
28-002-016	1

VIPER JET NOZZLES - PLASTIC

Adjustable Straight or Fog spray
• 360 L p/min

Part Number	Size
	inch
28-003-024	1-1/2

BRASS JET NOZZLE

With Hose Tail

Part Number	Size
	inch
28-020-012	3/4
28-020-016	1

CLAMP PERFORMER W/DRIVE SOLID BAND S/STEEL

These W4 Stainless Steel Solid Band Wormdrive Clamps provide superior design and proven reliability to the user. Also available with a removable safety collar to prevent screwdriver slip injuries they can be used for industrial, hardware, automotive and general applications. All Performer Clamps have been indepentently tested.

Construction:
W4 S/Steel Solid Band (band width, mm)

Part Number	Clamp Range
	mm
40-030-027	16-27
40-030-032	20-32
40-030-053	35-53
40-030-057	40-57

RING (NUT) & TAIL BRASS P5

Female BSP Nut x Hose Tail

Part Number	Size
	BSP X H/T
22-430-012-016	1 x 3/4
22-430-016-016	1 X 1
22-430-024-024	1-1/2 X 1-1/2

RING (NUT) & TAIL POLYPROPELENE (PPN)

Female BSP Nut x Hose Tail

Part Number	Size
	BSP X H/T
27-101-012-016	1 x 3/4
27-101-016-016	1 X 1
27-101-024-024	1-1/2 X 1-1/2

POLY STRAINERS

Ideal for stopping debris & foreign matter from entering lines in domestic water applications.

Part Number	Size
	inch
28-300-024	1-1/2
28-300-032	2

ALL PRICES EXCLUDE GST

21 Sanyo Drive
Wodonga VIC 3690
(02)6056 9068
sales@rapidhydraulics.com.au

Opening Hours:
Mon to Fri: 7.30am - 5.00pm
Sat: 8.00am to 12.00pm
Sun: closed